



curbside pick



Driscoll

WHAT A NIGHT

FRIDAY FIREWORKS

0	0	0
400	100	000
5	5	0
200	1000	10
4	1	1

reliant POWERING THE HOOKS reliant

FRIDAY FIREWORKS

# Hooks™






# NETTING EXTENSION



- Extend foul line netting to end point of seating bowl at left and right field.
- Using existing infrastructure, protective netting will be harnessed to on-field pole extending to end of seating bowl utilizing field railing along upward incline.
- Same netting grade as existing netting will be installed for continuity and fan viewing.
- Extension is facilitated by amended guidance from Major League Baseball regarding fan protection.

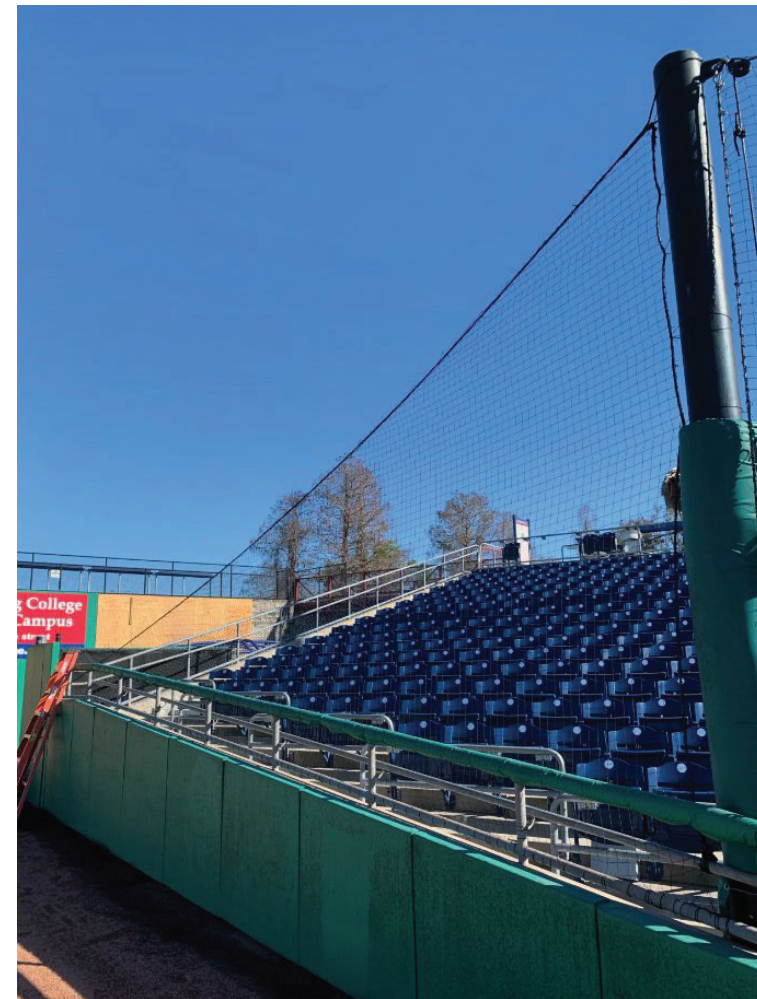



# CONCRETE REPAIRS




- Repair cracked concrete located where the concourse meets the top steps where aisles contain I-beam placement.
- Total of eleven (11) locations
- Area around all sides of I-beam will be replaced, refortified and new concrete installed





# CONCRETE REPAIRS

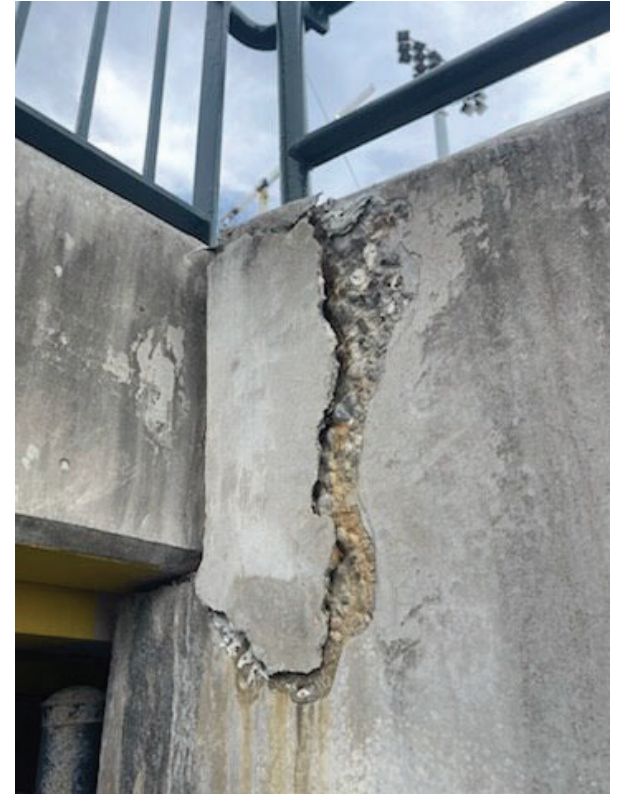

Miscellaneous concrete repairs throughout stadium to eliminate failures and trip hazards



# VIDEOBOARD STEEL REPAIRS



- Repair damaged and deteriorated purlins at the videoboard location.
- Temporarily remove videoboard, scoreboard and rotating panels to allow for replacement and repair of four (4) purlins.
- Assess all bolts and brackets as removal allows for full visibility.








# SCOREBOARD STEEL REPAIRS







# STADIUM SEAT REPLACEMENT

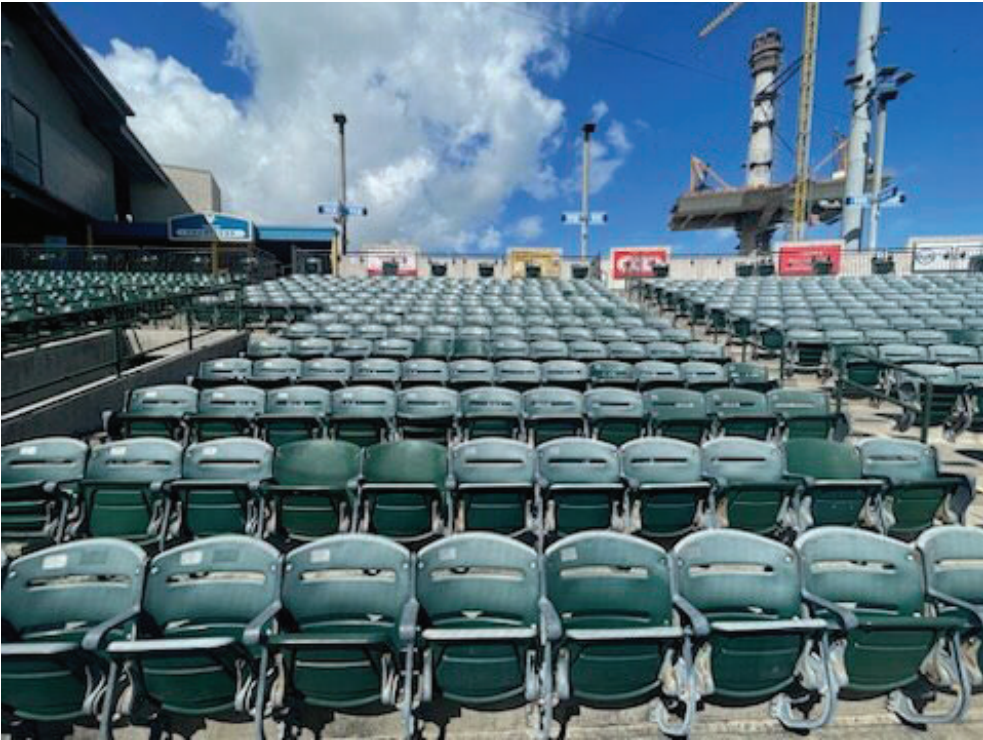

Should the previously described projects be executed under budget, remaining funds could supplementally support the Hooks seating project.

The Hooks will be removing and replacing 1,781 original seats, the last of which remain. The seat design is flawed with a short seat pivot arm supporting the seat bottom and is prone to breaking. The company is long out-of-business and no attic stock remain for ongoing replacements.

New seat stanchions, backs and bottoms to be installed. Seat model will match those of existing seats for interchangeable compatibility.