





Citywide Water Line Repair/Replace- Large Diameter IDIQ



Council Presentation
March 7, 2023



Project Location

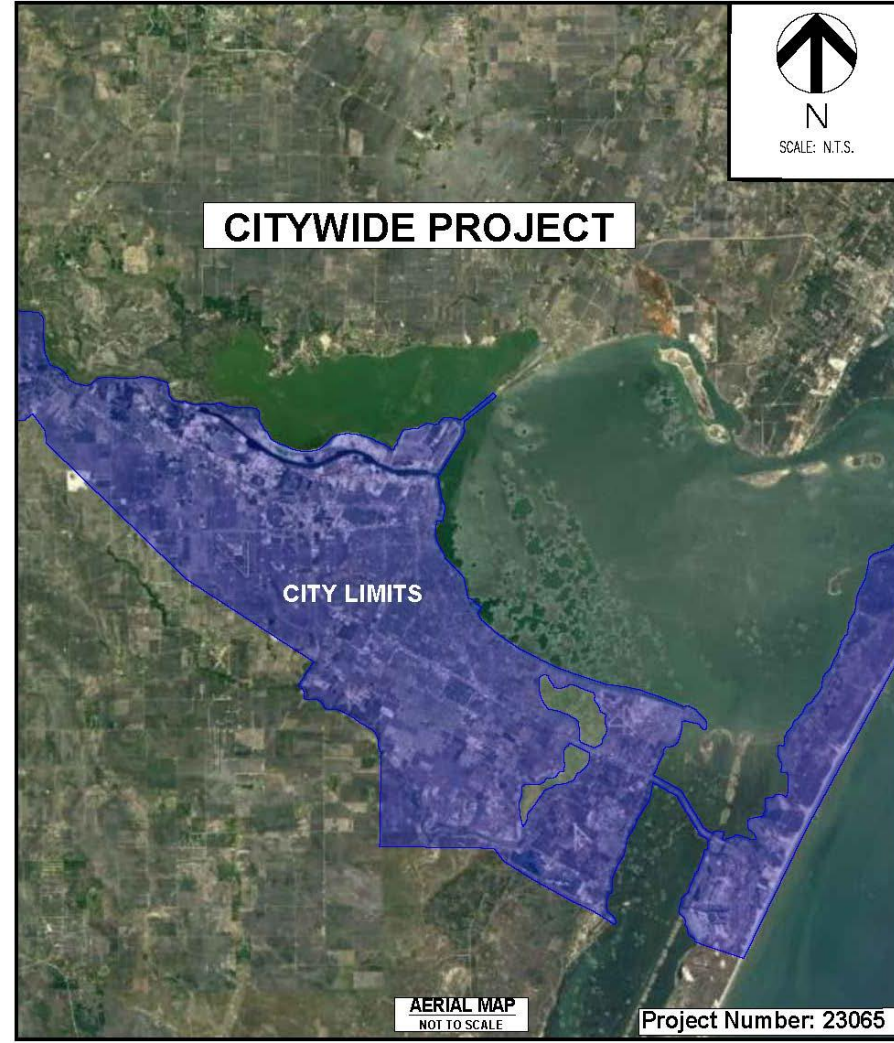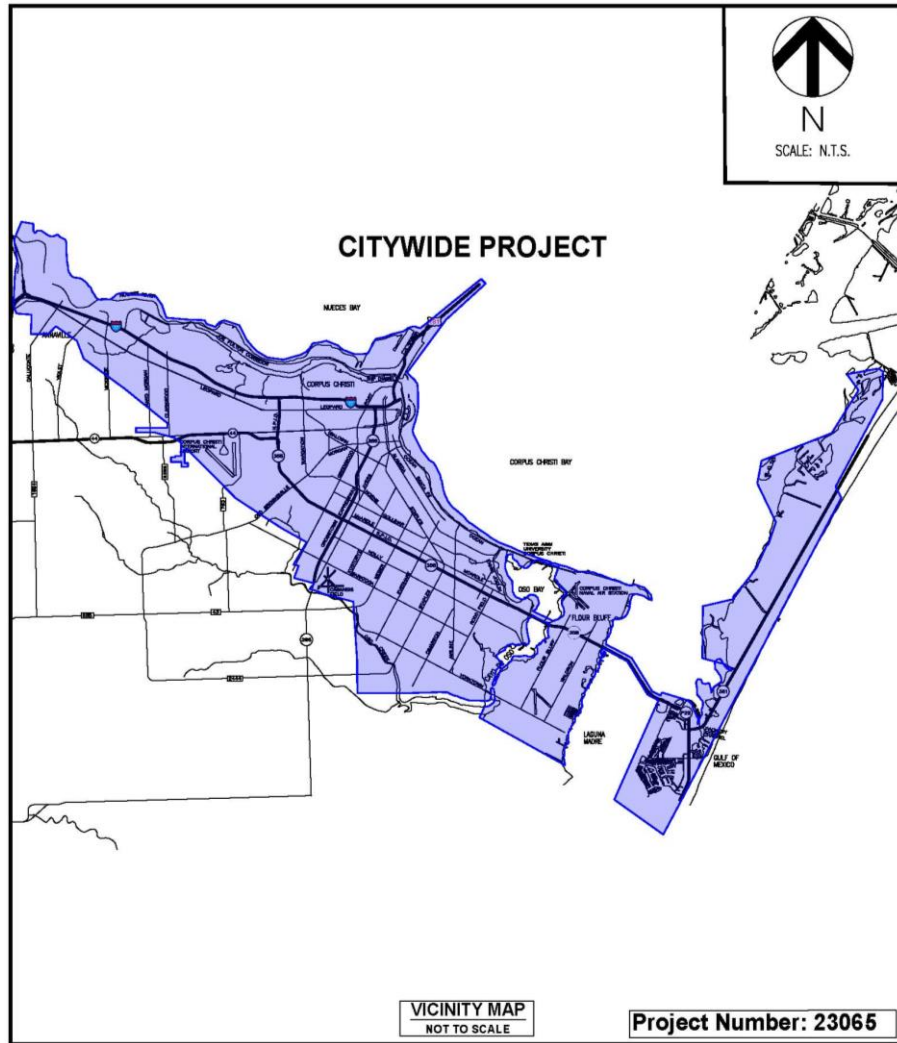



Project Scope




Proposed improvements is as follows:

- Project will include removal and abandonment of water lines, installation of new 6-inch to 24-inch (max) water lines by open trenching or horizontal directional drilling, casing, new fire hydrants, valves, fittings, services, pavement repairs, and other miscellaneous items required to complete the project.
- Project also includes emergency response Delivery Orders that require Contractor to always have management personnel and crews available and on-call during the Contract to provide emergency response on-call services.
- Emergency Delivery Orders will include improvements for water lines from 2-inch to 24-inch (max).



Project Schedule

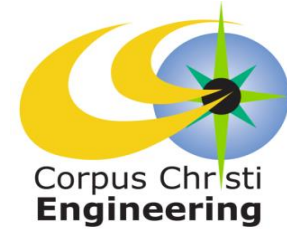

2022 2023	2023 - 2024
December - February	March - March
Bid/ Award	Construction

Projected Schedule reflects City Council award in February 2023 with anticipated completion in March 2024.