





# Cefe Valenzuela Landfill Road Improvements – Phase 2



Council Presentation  
November 12, 2024




# Cefe Valenzuela Landfill Road Improvements - Phase 2 Project Location

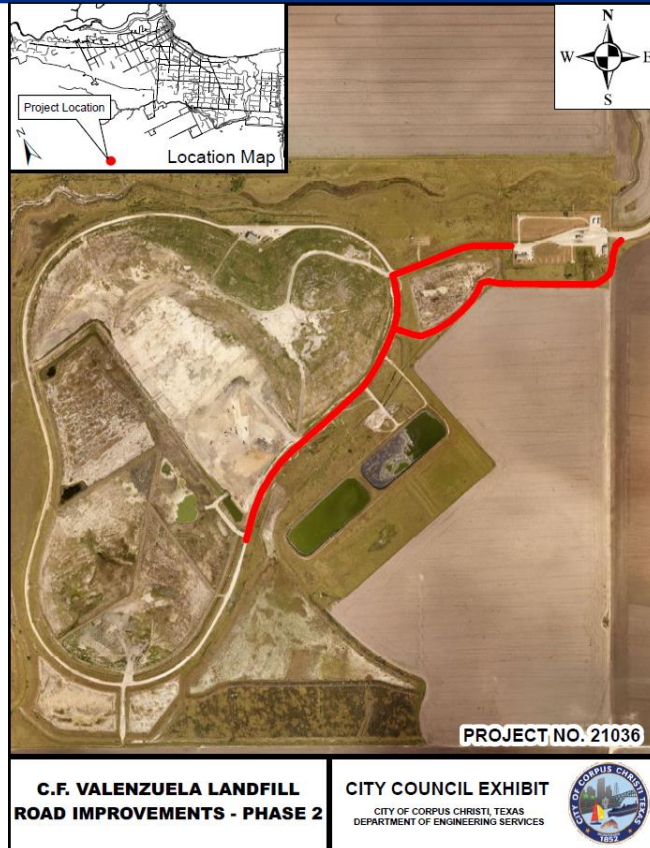



## Cefe Valenzuela Landfill Road Improvements - Phase 2 Scope of Work

---



Motion awarding a contract to Gerke Excavating, Rockport, TX, for the construction of Phase 2 of the Cefe Valenzuela internal roadway replacement project in the amount of \$2,643,574.91 .


The Cefe Valenzuela Landfill, operation since 2007, initially included an asphalt road built at the time of its opening. However, the original road was not designed to accommodate the significant daily traffic of over 400 trips by vehicles weighing more than 60,000 lb. This project represents the second phase of an approved Capital Improvement Plan (CIP) aimed at rehabilitating the road infrastructure.

The existing asphalt roadway will be replaced by:

- Rigid concrete near the scale house approaching the landfill cells.
  - Flexible base material for the roadway around the cells.
-



# Cefe Valenzuela Landfill Road Improvements - Phase 2 Project Schedule



2023-2024	2024	2024-2025
Sept - June	Aug - Nov	Dec - May
Design	Bid/Award	Construction

Projected Schedule reflects City Council award in November 2024, with anticipated construction completion by May 2025.