




Nueces Bay Boulevard & Poth Lane Waterline Replacement



Council Presentation
September 17, 2024



Project Location

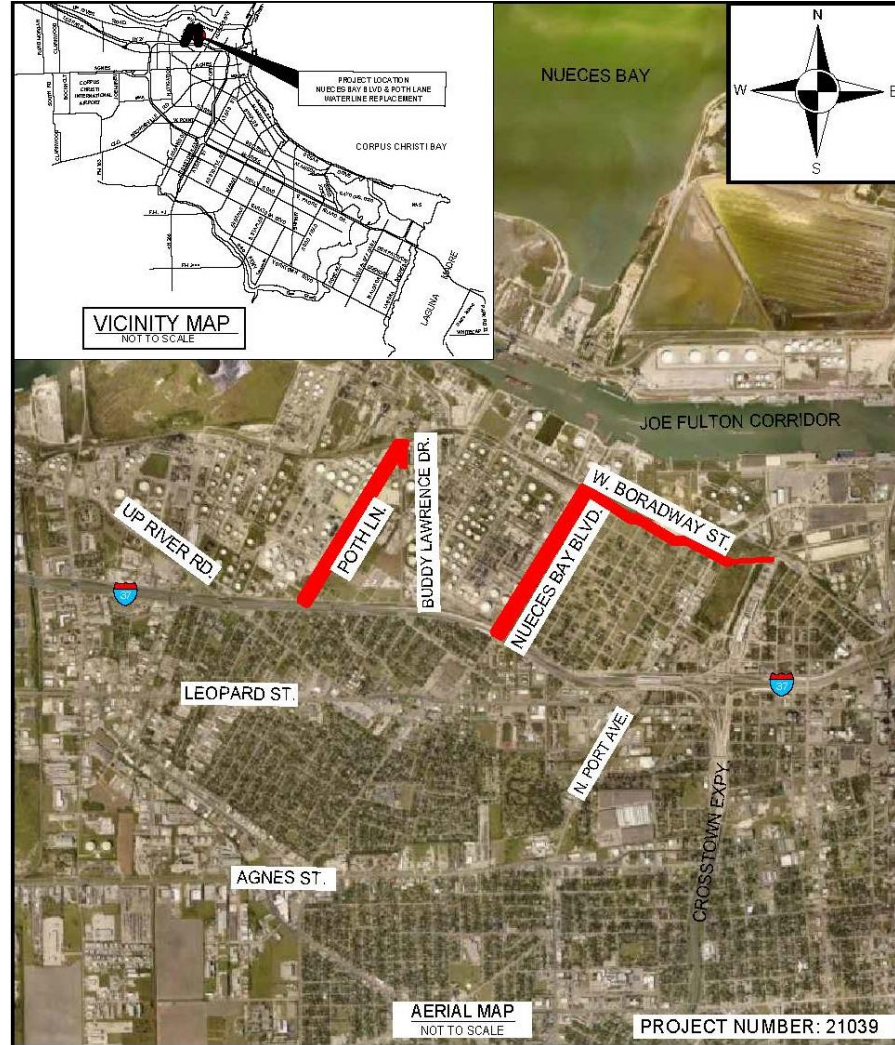



Project Scope




A summary of proposed improvements is as follows:

- Installation of waterline by open trench method of
 - 16,324 linear feet of 16-inch C900 DR18 PVC
 - 127 linear feet of 16-inch ductile iron
 - 62 linear feet of 12-inch C900 CR18 PVC
 - 28 linear feet of 10-inch C900 DR 18 PVC
 - 1,089 linear feet of 8-inch C900 DR18 PVC
 - 20 linear feet of 8-inch ductile iron
 - 63 linear feet of 6-inch ductile iron
 - 681 linear feet of 6-inch C900 CR18 PVC
- Installation of 1,626 linear feet of 16-inch C900 DR18 PVC waterline by bore method
- Installation of 1,815 linear feet of 16-inch C900 DR18 fusible PVC waterline by horizontal direction drilling



Project Schedule

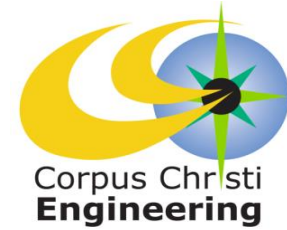

2021-2024	2024			2024-2026
February - June	J	A	S	October - May
Design	Bid/Award			Construction

Projected Schedule reflects City Council award in September 2024 with anticipated completion in May 2026.