



HSIP Project Submission

Proposal Information			
District		County	
Comments			
File Name		Supervised By	

Roadway Information			
Primary Roadway		Control Section(s)	
Limits From		DFO*	
Limits To		DFO*	

*Lat/Long pairs for off-system

On or Off System		Speed Limit	
Length		Current AADT	

Intersecting Roadway		Speed Limit	
On or Off System		Current AADT	

Project Information				
Targeted or Systemic		Crashes	K	
Work Code(s)			A	
Preferred Letting			B	
			SII	

Estimate	
Bid Items (See Guidelines instructions)	
ROW (if required)	
Mobilization and Barricades ($\geq 8\%$)	
Safety (2-5%)	
Inflation ($\geq 10\%$)	
Total	

Alameda Street Hospital Zone 2: Pedestrian Crossing Improvements on S Alameda Street and Sinclair Street

ITEM	SPEC NO.	DESCRIPTION	UNIT	ESTIMATED QUANTITY	UNIT PRICE	TOTAL
1	416 6030	DRILL SHAFT (TRF SIG POLE) (24 IN)	LF	12	\$181.75	\$2,181.00
2	529 6002	CONC CURB (TY II)	LF	92	\$8.40	\$772.80
3	531 6016	CURB RAMPS (TY 21)	EA	1	\$2,140.75	\$2,140.75
4	536 6002	CONC MEDIAN	SY	14	\$52.15	\$730.10
5	636 6001	ALUMINUM SIGNS (TY A)	SF	66	\$24.90	\$1,643.40
6	644 6027	IN SM RD SN SUP&AM TYS80(1)SA(P)	EA	4	\$515.00	\$2,060.00
7	668 6076	PREFAB PAV MRK TY C (W) (24") (SLD)	LF	90	\$10.60	\$954.00
8	668 6091	PREFAB PAV MRK TY C (W) (18")(YLD TRI)	EA	26	\$26.90	\$699.40
9	677 6007	ELIM EXT PAV MRK & MRKS (24")	LF	90	\$2.95	\$265.50
10	685 6003	REMOVE RDSB FLASH BEACON ASSEMBLY	EA	2	\$767.80	\$1,535.60
11	685 6004	INSTL RDSB FLSH BCN ASSM (SOLAR PWRD)	EA	2	\$5,750.00	\$11,500.00
12	6000 6130	INSTALL LUMINAIRE 250 W EQ (LED)	EA	2	\$600.00	\$1,200.00
Subtotal						\$25,682.55
13	500 6001	MOBILIZATION	LS	1	\$1,284.13	\$1,284.13
14	502 6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	1	\$2,568.26	\$2,568.26
Bid Items (not including 500 & 502)						\$25,682.55
ROW (if required)						\$0.00
Mobilization and Barricades (≥8%)						\$3,852.38
Safety (2-5%)						\$1,476.75
Inflation (≥10%)						\$3,101.17
Total Construction Cost						\$34,112.85

TXDOT AVG UNIT PRICE
\$181.75
\$8.40
\$2,140.75
\$52.15
\$24.90
\$515.00
\$10.60
\$26.90
\$2.95
\$767.80
\$5,750.00
\$600.00

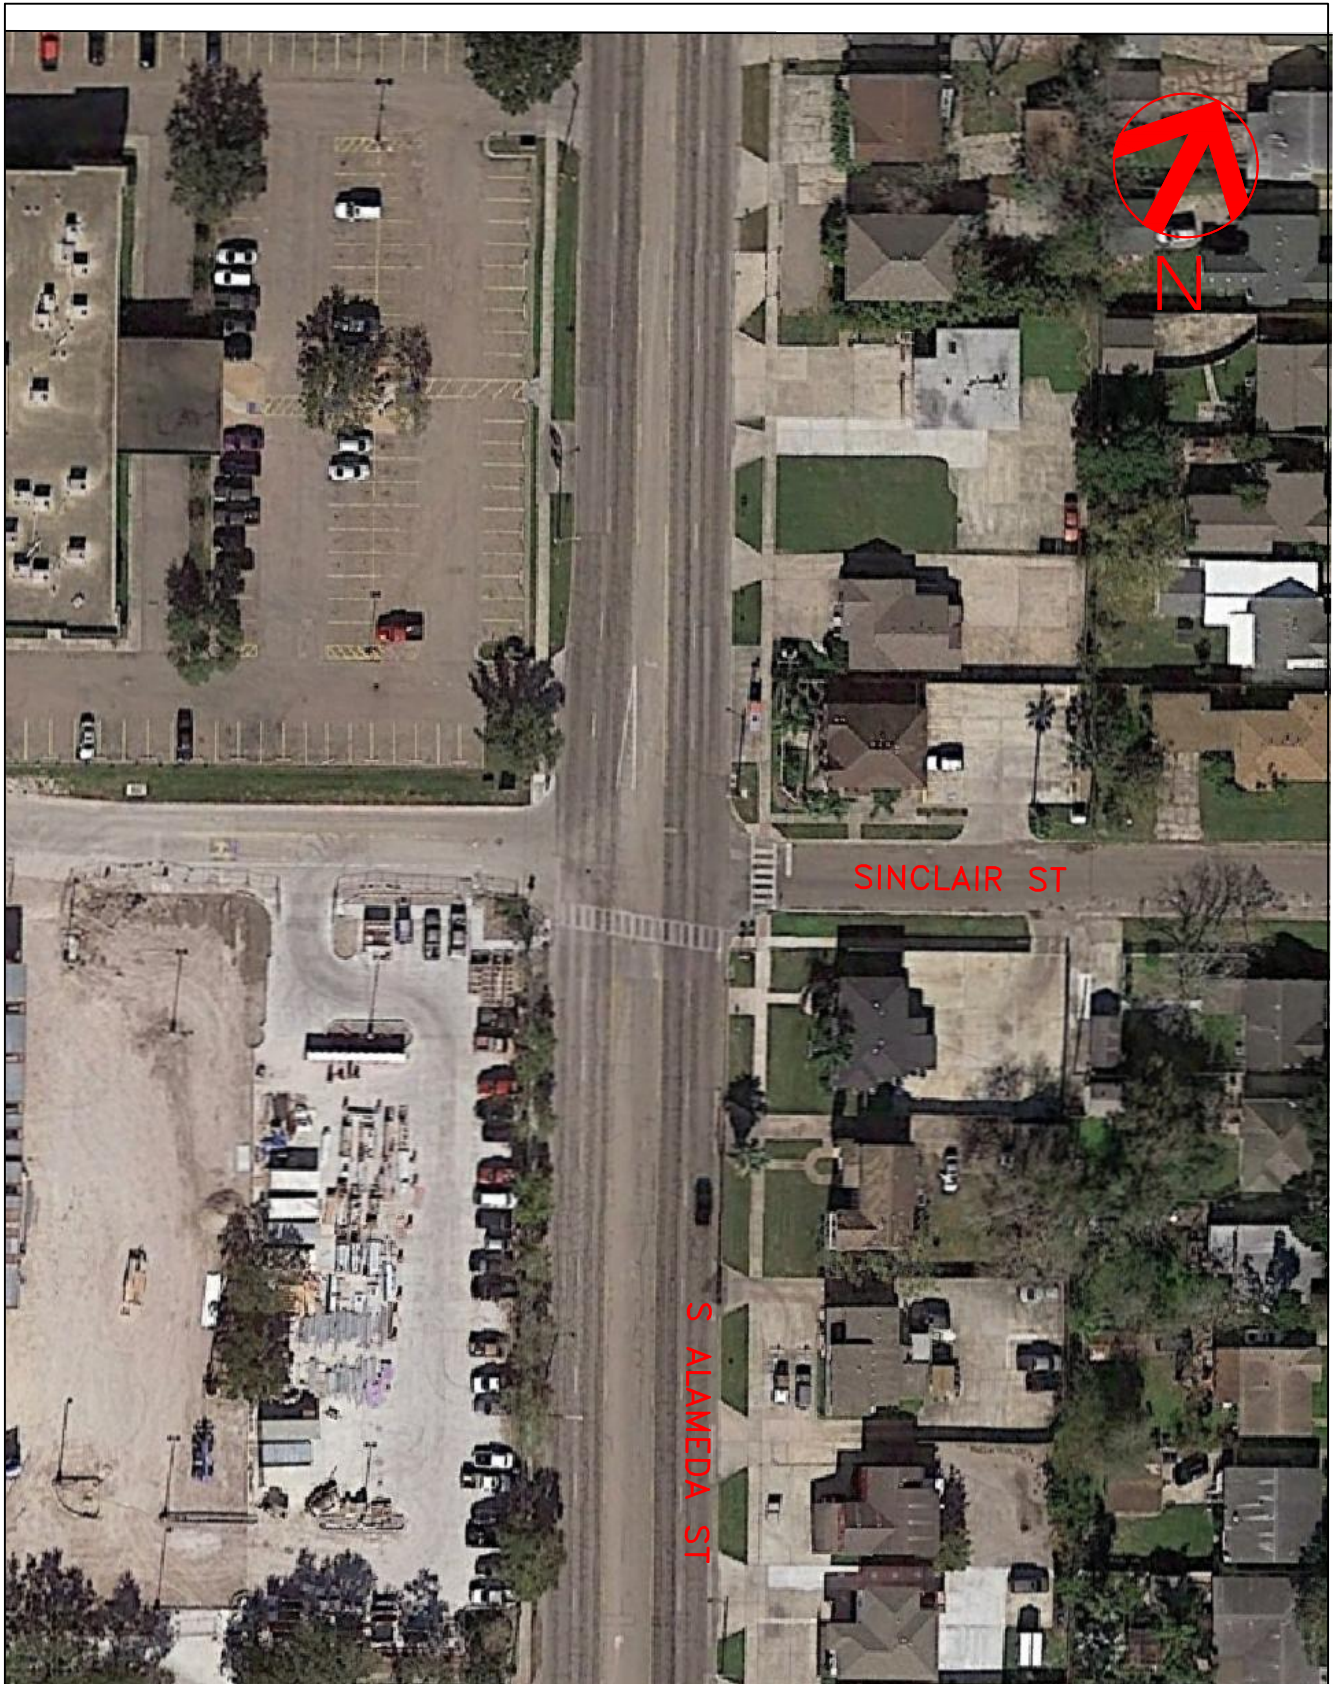


EXHIBIT – ALAMEDA STREET HOSPITAL ZONE 2:
PEDESTRIAN CROSSING IMPROVEMENTS ON S ALAMEDA STREET AND SINCLAIR STREET